

NEW

YM225
YM232
YM238

	YM225	YM232	YM238
Ideal Acreage		25-45 acres	
Engine HP	24.4 HP	31.8 HP	38.2 HP
Loader Lift Capacity		1,500 LBS.*	
Transmission	Synchronized Reverser Transmission (SRT)		

*lift capacity to maximum height at pivot pin



YM2
SERIES

HIGH LOADER LIFT CAPACITY (1500LBS @PIN)

- Serious strength in a compact package
- Great for material handling where it would be difficult to maneuver with a larger tractor
- Add the optional 3rd function hydraulic kit to power attachments like a grapple for even more productivity

8X8 GEAR SRT (SYNCHRO-REVERSE TRANSMISSION)

- Simple, durable, efficient
- The synchronized forward/reverse shift, located conveniently on the column, makes changing direction a breeze! Ideal for loader work and other operation that requires frequently changing direction


MAKE IT YOUR OWN!

- Loader
- Canopy kit
- Deluxe suspension seat
- LED work light
- Backhoe
- Single spool rear remote
- 3rd function kit


*TURBO

Elevate your tractor to a high-performance machine with the YM238 Turbo!

- Increased power
- Greater fuel efficiency
- Improved performance
- Reduced emissions
- Improved torque
- Less noise
- Better performance at high altitudes

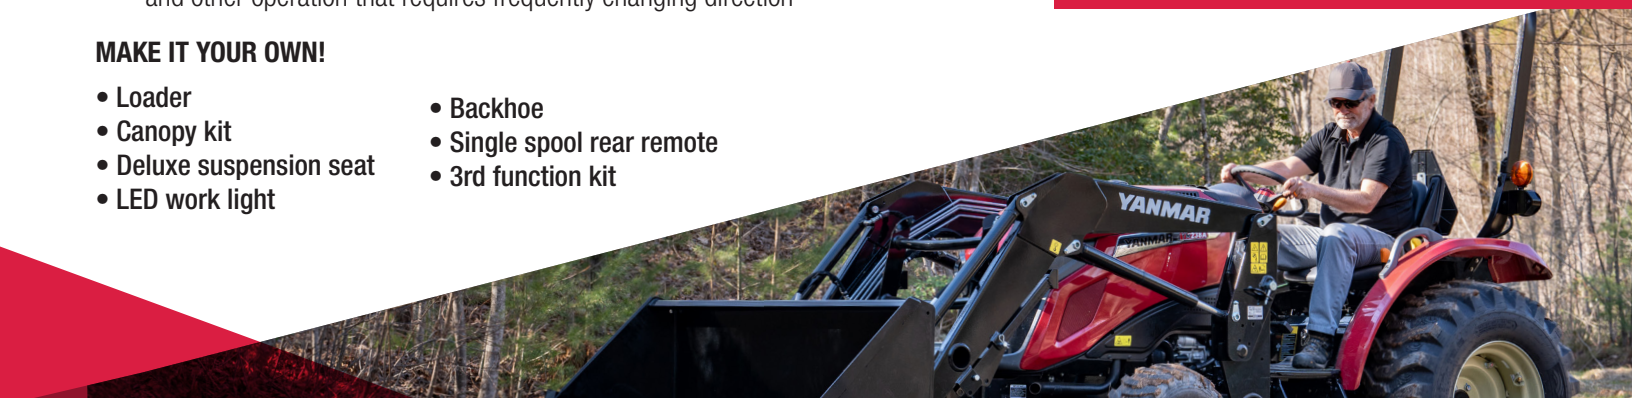

NEW

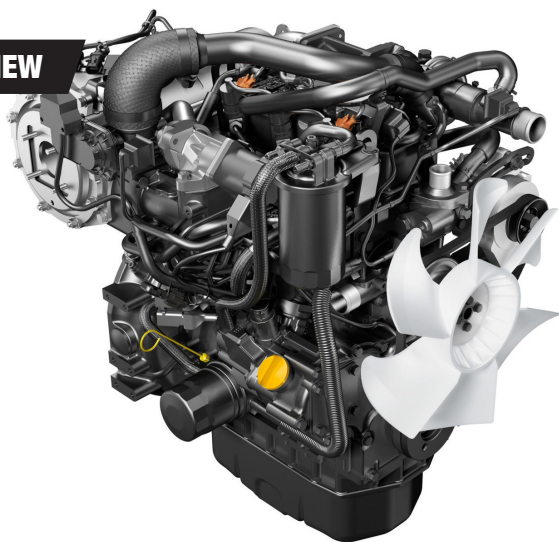


TURBO ENGINE AVAILABLE ON YM238.

YM225 YM232 YM238 TRACTOR



INFORMATIVE DISPLAY PANEL.

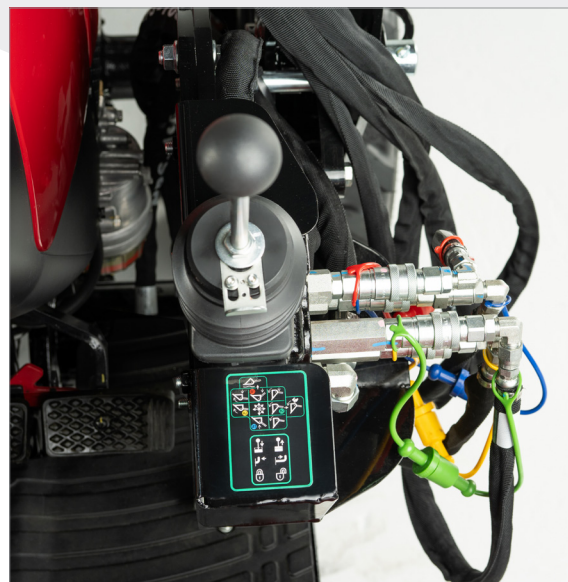

LOADER CONTROLS FOR EASE OF LIFTING UP TO 1,500 LBS AT THE PIVOT PINS.

SPECIFICATIONS

	YM225	YM232	YM238
Ideal Acreage	25-45 acres		
Engine HP	24.4 HP (18.2 kW)	31.8 HP (23.7 kW)	38.2 HP (28.5 kW)
Transmission	Synchronized Reverser Transmission (SRT)		

WARRANTY COVERAGE

Tractor*	24 months or 2,000 hours (whichever comes first)
Powertrain*	10 years or 3,000 hours (whichever comes first)

*for non-commercial, home and residential use only

POWERTRAIN

Engine Manufacturer	Yanmar		
Engine Gross Power	24.4 HP (18.2 kW)	31.8 HP (23.7 kW)	38.2 HP (28.5 kW)
PTO Power	18.5 HP (13.8 kW)	25.5 HP (19.0 kW)	31.9 HP (23.8 kW)
Rated Engine Speed	2,400 RPM	2,600 RPM	2,600 RPM
Clutch	Dry Single Plate		

CAPACITIES

Fuel Tank	10.5 gal. (40.0 L)
-----------	--------------------

DRIVETRAIN

Transmission Type	Synchronized Reverser Transmission (SRT)
Rear Differential Lock	Foot Pedal Engagement
2WD/4WD Engagement	Selectable
PTO Type	Transmission Driven with Overrunning Clutch
Rear PTO Speed	540 RPM @ 2,360 rpm

	YM225	YM232	YM238
--	-------	-------	-------

HYDRAULICS

Pump Capacity (Steering)	3.8 GPM (14.5 L/min)	4.1 GPM (15.7L/min)	4.1 GPM (15.7L/min)
Pump Capacity (Implement)	6.2 GPM (23.8 L/min)	6.8 GPM (25.8 L/min)	6.8 GPM (25.8 L/min)
3-Point Hitch	Category 1		
3-Point Lift Capacity (Std.)	2,205 lbs. (1,000 kgf)		
3-Point Lift Capacity at 24" (61 cm)	1,609 lbs. (730 kgf)		
Remote Valve	Optional		
3rd Function Valve	Optional		

DIMENSIONS AND WEIGHT

Minimum Ground Clearance	10.6" (269 mm)		
Total Weight	2,800 lb. (1,270 kg)	2,866 lb. (1,300 kg)	2,866 lb. (1,300 kg)

FRONT END LOADER

	YL405
Maximum Lift Height to Pivot Pin	88.3" (2,578 mm)
Lift Capacity to Maximum Height at Pivot Pin	1,500 lb. (682 kgf)
Breakout Force at Pivot Pins	2,500 lb. (1,134 kgf)



To learn more or
find a dealer nearest
you, please visit
YanmarTractor.com

YANMAR has a corporate policy of continuous product improvement and development; therefore data, specifications, and warranty are subject to change without any advance notice. There may be differences between the specifications and illustrations contained in this publication and the actual equipment. Equipment components produced by other manufacturers may be shown in photographs in this publication for the purpose of illustration only and is not intended as an endorsement of that particular equipment or its suitability. Inspect equipment before using it and be sure it is operating properly. The product depictions are not meant to be used or relied upon as a substitute for the safety and use information that is published in the respective operator's manual. Before operating a machine, read, understand, and follow all instructions of the manual and on the machine. YANMAR disclaims all representations, express or implied, or any liability from the use of this publication.